

REOWAVE®passive* 480 V / 60 Hz

Electrical and mechanical data

- Insulation class: F
- Climate class: 25/085/21 DIN IEC 68 Part 1
- Ambient temperature: 40° C
- Protection rating: IP20 – various housing shapes depending on power

Technical data

REOWAVE®passive* 480 V / 60 Hz												
Image No.	CNW type Choke1/ Choke2	Main choke [A]	Loss [W]	Housing dimensions in mm							Weight [kg]	Clamp [mm ²]
				L	B	H/H1	H2	N1	N2	D		
4	CNW 8981/9	9	120	570	240	175	-	545	150	9	25	10
4	CNW 8981/12	12	120	570	240	175	-	545	150	9	30	10
5	CNW 8981/16	16	160	670	275	175	-	645	200	9	35	10
5	CNW 8981/22	22	230	670	275	175	-	645	200	9	40	10
5	CNW 8981/32	32	241	820	340	175	-	795	250	9	50	10
5	CNW 8981/36	36	300	820	340	175	-	795	250	9	50	10
6	CNW 8981/45	45	313	1000	360	260	-	925	298	13	65	16
6	CNW 8981/55	55	420	1000	360	260	-	925	298	13	65	16
6	CNW 8981/70	70	487	1000	360	260	-	925	298	13	80	16
7	CNW 8981/90	90	580	765	475	520	-	675	316	13	125	50
7	CNW 8981/110	110	710	765	475	520	-	675	316	13	175	50
7	CNW 8981/145	145	860	765	475	520	-	675	316	13	200	50

*All variants are also available as REOWAVE®passive Plus

REOWAVE®passive* 480 V / 60 Hz

REOWAVE®passive* 400 V / 50 Hz		
Image No.	CNW type Choke1/ Choke2	Main choke [A]
9	CNW 8981/800	800
9	CNW 8981/1000	1000
9	CNW 8981/1200	1200

A special structure is required for this due to the particular design so **please contact us about this!**

Technical data

REOWAVE®passive* 480 V / 60 Hz												
Image No.	CNW type Choke1/ Choke2	Main choke [A]	Loss [W]	Housing dimensions in mm						Weight [kg]	Clamp [mm ²]	
				L	B	H/H1	H2	N1	N2			D
8	CNW 8981/180	180	1000	600	600	1800	200	-	-	-	340	-
8	CNW 8981/200	200	1100	600	600	1800	200	-	-	-	345	-
8	CNW 8981/230	230	950	600	600	1800	200	-	-	-	352	-
8	CNW 8981/270	270	1140	600	600	1800	200	-	-	-	370	-
8	CNW 8981/330	330	1570	600	600	2000	200	-	-	-	427	-
8	CNW 8981/370	370	1680	600	600	2000	200	-	-	-	427	-
8	CNW 8981/400	400	1410	600	600	2000	200	-	-	-	442	-
8	CNW 8981/450	450	1500	600	600	2000	200	-	-	-	473	-
8	CNW 8981/550	550	1850	800	800	2000	200	-	-	-	540	-
8	CNW 8981/650	650	2090	800	800	2000	200	-	-	-	597	-

*All variants are also available as REOWAVE®passive Plus

REOWAVE®passive in IP20

Image 4

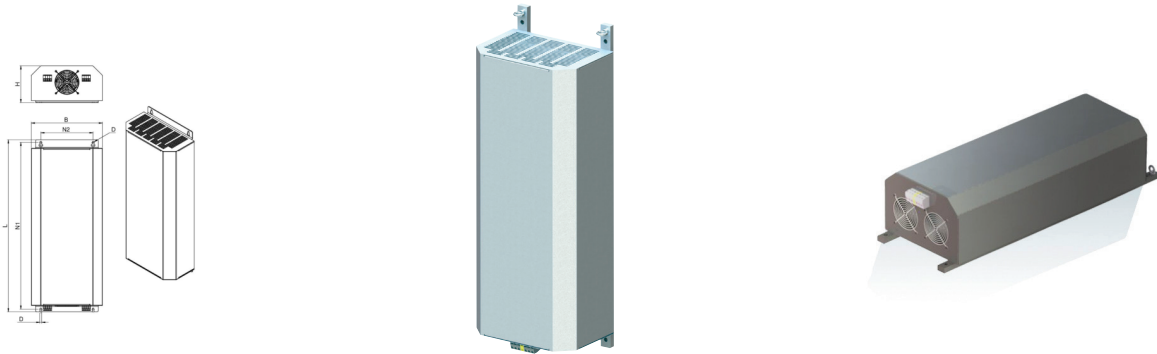


Image 5




Image 6




Image 7




Image 8




Image 9

